



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

**RAASM S.p.a.**

Via Marangoni 33, 36022  
S. Zeno di Cassola (VI) Italy  
Tel. +39 0424 570891  
info@raasm.com

## P/N 2210LF

Cable reel s. 280, without transformer. Number of conductors 2, cable type 2 x 1 - H05 RN-F, cable length 14 + 1 (m). Equipped with led light s. L1224 and supply voltage from 12 V to 24 V AC/DC. Rewinding clutch as standard.

### AREAS OF USE


Aeronautics, Agriculture, Automotive, Cleaning, Building and road construction, Chemical industry, Manufacturing industry, Mining industry, Lube trucks and transports, Shipping and offshore, Railway transport

### FEATURES

Information	without transformer
Protection degree of electrical part	IP44
Environment temperature	-5 ÷ +40 °C
Number of conductors	2
Cable type	2x1 - H05 RN-F
Cable length	14 + 1 m
Cable inlet	1,2 m
Inlet voltage	12 ÷ 24 V AC/DC
Lamp power supply voltage	12 ÷ 24 V AC/DC
Lamp connection	-
Max power	3,6 W
Lamp protection degree	IP65
Light bulb supplied	p/n 728005
Rewinding clutch	yes
Lamp	p/n L1224
Packing	No. 1 - 0,043 m3



### OVERALL DIMENSIONS (mm)

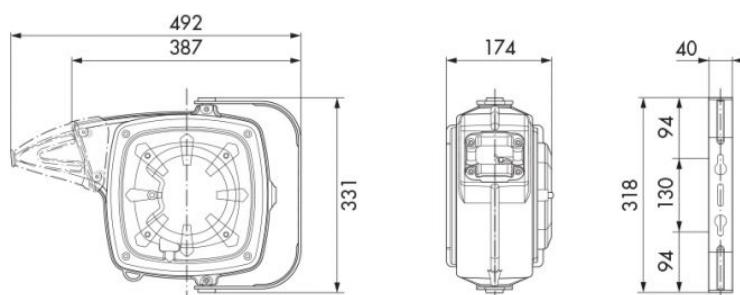

Gross weight

6,8 ÷ 8,8 kg