



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 33505


Diaphragm pump series AB-34 in aluminum with membrane in NBR and suction tube for tanks

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Flow rate	70 l/min
Ratio	1:1
Compatible fluids	water, mineral-vegetable oils, diesel fuel
Pump material	aluminum
Ball valve material	Hytrel®
Air inlet connection	G 3/8" (f)
Fluid inlet-outlet connection	suction tube \varnothing 34 mm - G 3/4" (f)
Air working pressure	2 ÷ 6 bar
Max supply pressure	8 bar
Average air consumption	500 l/min
Noise level	75 dB
Fluid temperature	-10 ÷ +90 °C
Max solids diameter	\varnothing 1,5 mm
Suitable for drums or tanks	tank
Suction-delivery ball valve with spring	ball valve with spring
Packing	No. 2 - 0,040 m3

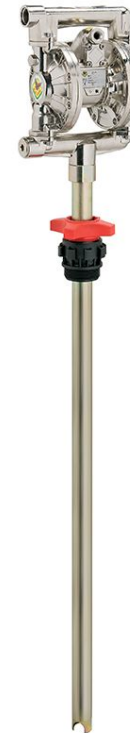

OVERALL DIMENSIONS (mm)

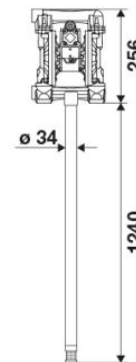

Weight

11 kg