



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

**RAASM S.p.a.**

Via Marangoni 33, 36022  
S. Zeno di Cassola (VI) Italy  
Tel. +39 0424 570891  
info@raasm.com

## P/N 33505

Diaphragm pump series AB-34 in aluminum with membrane in NBR and suction tube for tanks

### AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Lube trucks and transports, Shipping and offshore, Railway transport

### FEATURES

Flow rate	70 l/min
Ratio	1:1
Compatible fluids	water, mineral-vegetable oils, diesel fuel
Pump material	aluminum
Ball valve material	Hytrel®
Air inlet connection	G 3/8" (f)
Fluid inlet-outlet connection	suction tube $\varnothing$ 34 mm - G 3/4" (f)
Air working pressure	2 ÷ 6 bar
Max supply pressure	8 bar
Average air consumption	500 l/min
Noise level	75 dB
Fluid temperature	-10 ÷ +90 °C
Max solids diameter	$\varnothing$ 1,5 mm
Suitable for drums or tanks	tank
Suction-delivery ball valve with spring	ball valve with spring
Packing	No. 2 - 0,040 m3



### OVERALL DIMENSIONS (mm)

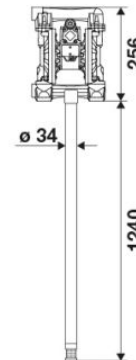

Weight

11 kg