



P/N 33518

Diaphragm pump series PPB-12 in polypropylene with suction tube in stainless steel for tanks

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

| | |
|---|-------------------------------------|
| Flow rate | 65 l/min |
| Ratio | 1:1 |
| Max pressure | 8 bar |
| Max cycles for minute | 350 cpm |
| Delivery for cycles | 0,188 l |
| Max suction lift | dry column 4,5 m - wet column 7,5 m |
| Max size pumpable solids | 1,5 mm |
| Max working temperature | 65 °C |
| Noise level | 76 dB |
| Max air consumption | 0,89 m3/min |
| Working pressure | 2 ÷ 6 bar |
| Air inlet connection | G 3/8" (f) |
| Air outlet connection (muffler) | G 3/4" (f) |
| Fluid inlet connection | G 3/4" (f) (G 1" (f) for drum) |
| Fluid outlet connection | G 1/2" (f) |
| Suction-delivery ball valve with spring | cylindrical ball valve |
| Membranes | EPDM |



OVERALL DIMENSIONS (mm)

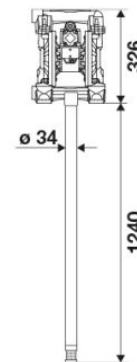

| | |
|--------------|--|
| Balls | acetal |
| Seats | polypropylene and AISI 316 stainless steel |
| Bung adaptor | p/n 33434 |
| Suction tube | 1240 mm - ø 34 mm |
| Packing | No. 2 - 0,034 m3 |
| Gross weight | 12,58 kg |