



ADVANCED FLUID
MANAGEMENT SOLUTIONS

RAASM S.p.a.

Via Marangoni 33, 36022
S. Zeno di Cassola (VI) Italy
Tel. +39 0424 570891
info@raasm.com

P/N 33518

Diaphragm pump series PPB-12 in polypropylene with suction tube in stainless steel for tanks

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Chemical industry, Lube trucks and transports, Shipping and offshore, Railway transport

FEATURES

Flow rate	65 l/min
Ratio	1:1
Max pressure	8 bar
Max cycles for minute	350 cpm
Delivery for cycles	0,188 l
Max suction lift	dry column 4,5 m - wet column 7,5 m
Max size pumpable solids	1,5 mm
Max working temperature	65 °C
Noise level	76 dB
Max air consumption	0,89 m3/min
Working pressure	2 ÷ 6 bar
Air inlet connection	G 3/8" (f)
Air outlet connection (muffler)	G 3/4" (f)
Fluid inlet connection	G 3/4" (f) (G 1" (f) for drum)
Fluid outlet connection	G 1/2" (f)
Suction-delivery ball valve with spring	cylindrical ball valve
Membranes	EPDM



OVERALL DIMENSIONS (mm)

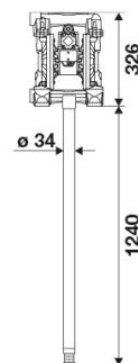

Balls	acetal
Seats	polypropylene and AISI 316 stainless steel
Bung adaptor	p/n 33434
Suction tube	1240 mm - ø 34 mm
Packing	No. 2 - 0,034 m3
Gross weight	12,58 kg