



P/N 64200

Wall mounted grease kit for 180÷220 kg drums with internal \varnothing 550÷600 mm, pump R 50:1 and hose reel p/n 8420.501

AREAS OF USE


Aeronautics, Agriculture, Building and road construction, Manufacturing industry, Mining industry, Lube trucks and transports, Centralized lubrication, Railway transport

FEATURES

| | |
|-------------------------|--------------------------------|
| Flow rate | 1500 g/min |
| Ratio | 50:1 |
| Compatible fluids | greases, medium/high viscosity |
| Suction tube upper body | aluminum |
| Suction tube | carbon steel |
| Air inlet connection | G 1/4" (f) |
| Fluid outlet connection | G 3/8" (f) |
| Air working pressure | 6 ÷ 8 bar |
| Average air consumption | 330 l/min |
| Noise level | 81 dB |
| Air max pressure | 8 bar |
| Suitable for drums | 180 ÷ 220 kg |
| Pump | p/n 62095 |
| Hose reels | p/n 8420.501 |
| Gun | p/n 66889 |
| Drum cover | p/n 65600 |
| Follower plate | p/n 66590 |
| Grease connection hose | 995.702 |



OVERALL DIMENSIONS (mm)

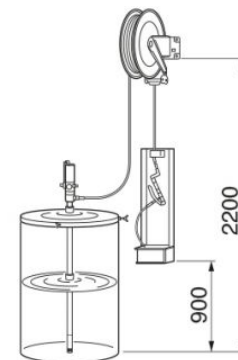

| | |
|-----------|------------------|
| Nipple | p/n 38073 |
| Drip-tray | p/n 88630 |
| Packing | No. 4 - 0,150 m3 |
| Weight | 66,8 kg |