

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 8618.200

Motorized hose reel s. 618, for hot water, 100 bar, without hose. Inlet-outlet G 1" (f)

AREAS OF USE


Manufacturing industry, Mining industry, Shipping and offshore, Railway transport

FEATURES

Pressure	100 bar
Compatible fluids	water max 130 °C
Swivel joint	AISI 304 stainless steel
Seals	Viton [®]
Characteristic	pneumatic
Material	painted steel
Couplings	-
Hose	-
ø and hose length	-
Inlet	G 1" (f)
Outlet	G 1" (f)
Reel flow path	AISI 304 stainless steel - zinc plated steel



OVERALL DIMENSIONS (mm)

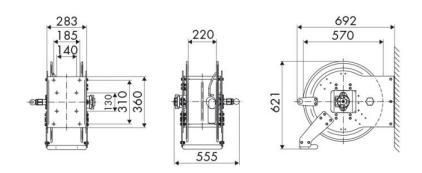

HOSE REELS CAPACITY

ø 3/8"	ø 1/2"	ø 5/8"	ø 3/4"	ø 1"
90 m	65 m	45 m	30 m	20 m