

Via Marangoni 33, 36022 S. Zeno di Cassola (VI) Italy Tel. +39 0424 570891 info@raasm.com

P/N 8329.200



Fixed hose reel s. 328, for AdBlue \circledR , 20 bar, without hose. Inlet-outlet G 3/8"(f)

AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road construction, Manufacturing industry, Lube trucks and transports

FEATURES

Pressure	10 bar	
Compatible fluids	AdBlue®	
Swivel joint	AISI 304 stainless steel	
Seals	Viton [®]	
Characteristic	fixed	
Material	painted steel	
Couplings	-	
Hose	-	
ø and hose length	-	
Inlet	G 3/8" (f)	
Outlet	G 3/8" (f)	
Reel flow path	AISI 304 stainless steel - nylon PA6	



OVERALL DIMENSIONS (mm)

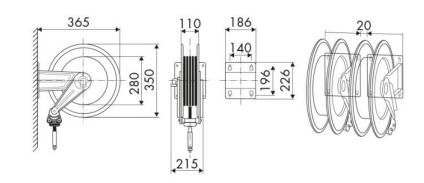

HOSE REELS CAPACITY

ø 8 x 12	ø 10 x 14,5	ø 13 x 19
18 m	16 m	12 m