



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

**RAASM S.p.a.**

Via Marangoni 33, 36022  
S. Zeno di Cassola (VI) Italy  
Tel. +39 0424 570891  
info@raasm.com

## art. 2B8/16117NH52



Diaphragm pump in aluminum and polypropylene series APPB-12 with dual inlet/multi ported outlet, membranes in NBR, balls in Hytrel®, seats in AISI 316 stainless steel and polypropylene and ball valves with spring

### ÁREAS DE USO


Aeronáutica, Agricultura, Automoción, Construcción y realización de carreteras, Industria química, Lube trucks y vehículos industriales, Naval y offshore, Transportes ferroviarios

### CARACTERÍSTICAS

Caudal	60 l/min
Relación	1:1
Fluidos compatibles	agua, aceites minerales-vegetales, gasóleo
Material del motor y bridas internas	aluminio
Material en contacto con el fluido	polipropileno
Material de esferas de las válvulas	Hytrel®
Empalme de entrada de aire	G 3/8" (h)
Empalme entrada-salida de fluido	doble entrada/salida múltiple G 3/4" (h) x G 1/2" (h)
Presión de funcionamiento	2 ÷ 6 bar
Presión máx. de alimentación	8 bar
Consumo medio de aire	400 l/min
Ruido	75 dB



### DIMENSIONES TOTALES (mm)

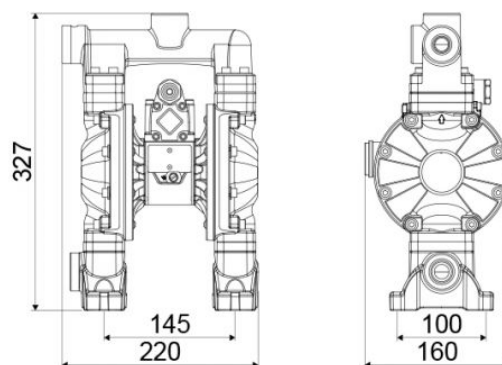

Temperatura del fluido	-10 ÷ +65 °C
Diámetro máx. de los sólidos de paso	∅ 1,5 mm
Válvulas de aspiración e impulsión	válvula esférica con muelle en una jaula cilíndrica
Empaquetado	N° 1 - 0,015 m3
Peso	7 kg